



SHARK ATV WINDSHIELD

Assembly Instructions

Parts list

[1] Plastic Collars



[2] Handlebar clamps




[3] Bolts, Long



[4] Support Arms Connectors



[5] Support Arms

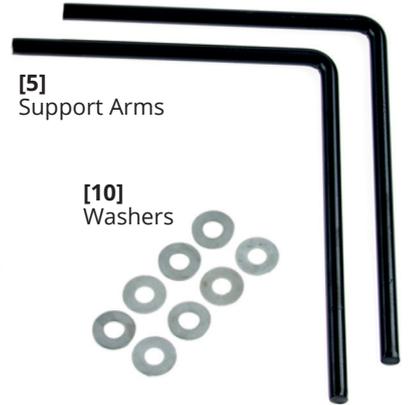


[6A] Allen Bolts, Short

[6B] Allen Bolts, Medium



[8] Windshield

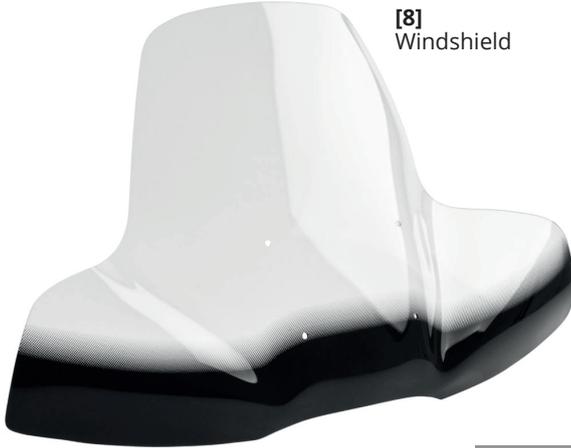

[9] Windshield Bolts



[10] Washers



[7] Windshield Brackets



[11] Rubber Washers




[12] Wing Nuts




For ease of installation and windshield placement, leave all hardware loose until final position of windshield is achieved.

Assembly



#1 Install Plastic collars [1] on handlebars where the Handlebars clamps [2] will be located.

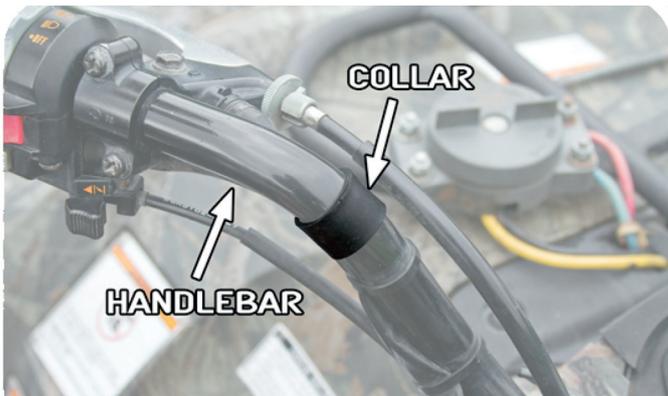


#2 Install Handlebar clamp [2] over the Plastic collar [1] using Bolt, Short [6A]. Place Support Arms Connector [4] into the recessed hole of the Handlebar clamp [2], and screw it through the Clamp using Bolt, Long [3]. Screw Bolt, Medium [6B] into each Support Arms Connector [4].

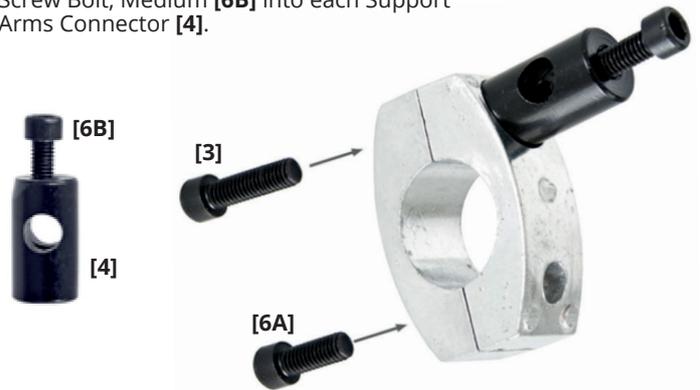


#3 Install Windshield support arm [5] into each Support Arms Connector [4] and fix it with Bolt, Medium [6B].

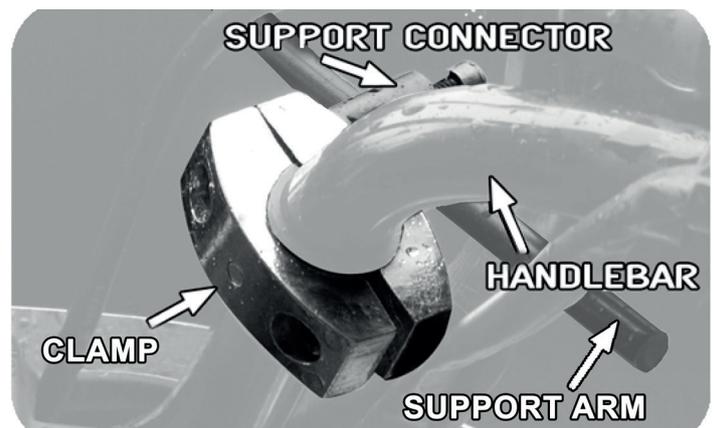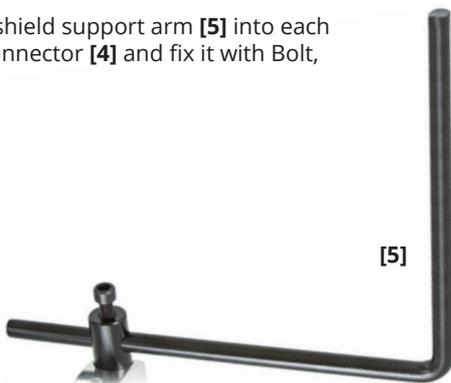

#4 Install two Windshield brackets [7] on each Support arm [5].

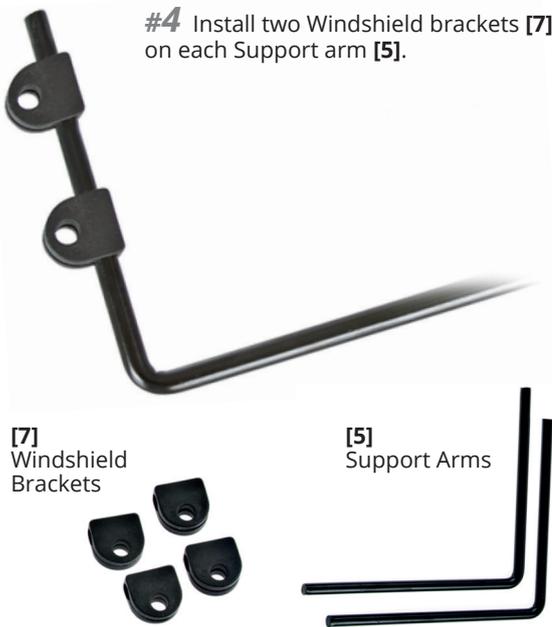

#5 Position Windshield [8] on the Windshield brackets [7]. Install Windshield bolt [9] with Washer [10] and Rubber washer [11] through the Windshield and Windshield bracket [7]. Secure with washer [10] and Wing nut [12].

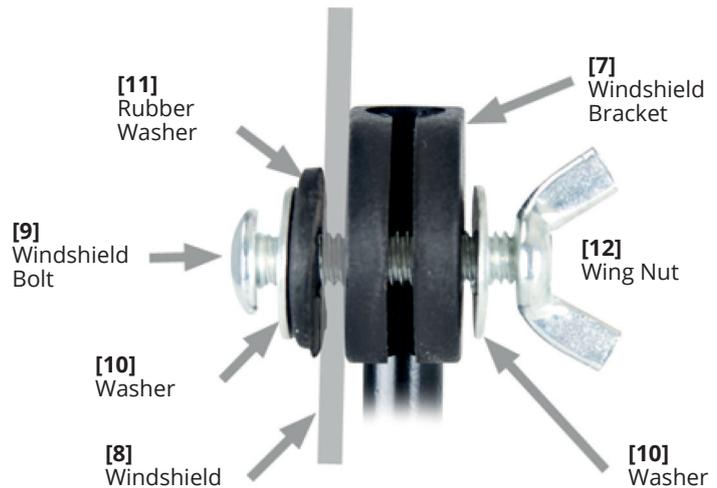

#6 To achieve desired position of the windshield, adjust the Support arms [5] and Brackets [2].

Note: This is a universal windshield kit. It may need adjustment to position properly on your ATV.

#7 Tighten all hardware. Pay attention not to over tighten.

Note: Before driving ATV, check proper operation of levers, throttle and handlebars to assure there is no interference with the windshield.



Official Distributor:



ASP Group s.r.o.
Staroplzenecka 290
326 00 Letkov, Czech Republic

+420 378 21 21 21
info@aspgroup.cz

www.aspgroup.eu
www.aspshop.eu